

Predicting Carpal Bone Kinematics using an Expanded Digital Database of Wrist Bone Anatomy and Carpal Kinematics

Bardiya Akhbari, Douglas C. Moore, David H. Laidlaw, Arnold-Peter C. Weiss
Edward Akelman, Scott W. Wolfe, Joseph J. Crisco

For additional data and periodic updates, check <https://simtk.org/projects/carpal-database>


Corresponding Author:

Joseph J. Crisco, Ph.D.
Bioengineering Laboratory
Department of Orthopedics
The Warren Alpert Medical School of Brown University and Rhode Island Hospital
1 Hoppin Street, CORO West, Suite 404
Providence, RI 02903
(401) 444-4231/ (fax) (401) 444-4418
Email: joseph_crisco@brown.edu

Table of Contents

Brown Wrist Graphic User Interface (GUI)	2
Overview	2
GUI Descriptions	3
▪ Data Selection Panel	3
▪ DOF Visualization Panel	4
▪ Bone Visalization Panel	4
Example (1) – Capitate Visualization	5
Example (2) – ScaphoidCapitate Visualization	6
Example (3) – TrapeziumCapitate Visualization.....	7
Mathematical Model of Wrist Motion	8
▪ Motion Simulator	8
Example (4) – Carpal Bones Visualization.....	9

Brown Wrist Graphic User Interface (GUI)

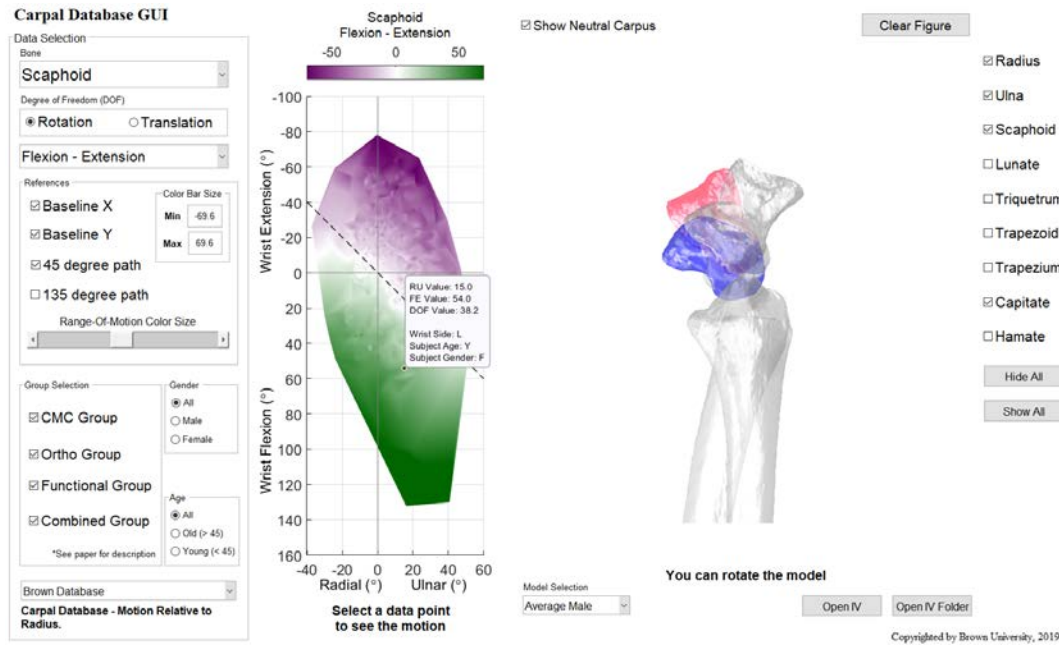

Overview


The interface lets users select a wrist motion to observe its carpal bones orientation and translation both quantitatively and visually. Users can select a data point from the wrist graph (middle pane) and look at the motion of the carpal bones on an average carpal bones' model (right pane). When you select a point, you can see information such as the wrist's radial-ulnar deviation (RU), wrist's flexion-extension (FE), the selected-DOF value (e.g., scaphoid flexion-extension), age, wrist's side, and gender of the subject that the information is coming from.

The database is coming from four different studies with different age and gender categories and all these parameters can be toggled on or off inside the GUI. The bone models can be selected or browsed by the user. As a default, an average (based on bone volumes in the database) male model from the database is selected. Users can also upload subject-specific bone models (note: they must be acquired in the neutral pose described in the manuscript) to evaluate the database motions on the specific model. Please look at the "ReadMe_File Structure" document for more information on the mathematics and behind the seen calculations.

GUI Descriptions

■ Rotation and Data Selection Handles

On the top-left of the window, you can see this toolbar:

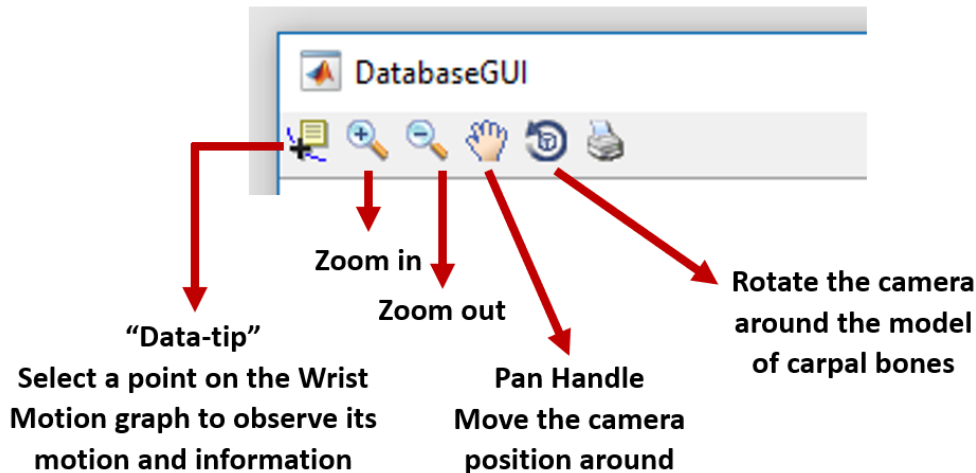

Data-tip is the most important tool for selecting a data point on the wrist graph (middle pane). This will help you to change the viewpoints, so you can look at the models the way you like to or find an optimal orientation.


■ Data Selection Panel

The Data Selection panel contains the following controls:


- Bone:** A dropdown menu currently showing "Scaphoid".
- Degree of Freedom (DOF):** Radio buttons for "Rotation" (selected) and "Translation".
- Flexion - Extension:** A dropdown menu.
- References:** Checkboxes for "Baseline X", "Baseline Y", "45 degree path", and "135 degree path".
- Color Bar Size:** A slider with "Min" at -120.0 and "Max" at 120.0.
- Group Selection:** Checkboxes for "CMC Group", "Ortho Group", "Functional Group", and "Combined Group".
- Gender:** Radio buttons for "All" (selected), "Male", and "Female".
- Age:** Radio buttons for "All" (selected), "Old (> 45)", and "Young (< 45)".
- Database:** A dropdown menu currently showing "Brown Database".
- Footer text:** "Carpal Database - Motion Relative to Radius."

- Select the bone (*Default: Scaphoid*)
Scaphoid—Lunate —Trapezoid—Trapezium—Hamate—Capitate—Triquetrum
- Select the degree-of-freedom of the bones (*Default: Flexion-Extension*)
Rotation: Supination-Pronation Flexion-Extension Radial-Ulnar Deviation
Translation: Proximal-Distal Radial-Ulnar Volar-Dorsal
- Guides for the motion graph:
Baseline X: Shows the absolute wrist Radial-Ulnar deviation path
Baseline Y: Shows the absolute wrist Flexion-Extension path
45/135 degree path: Path oblique to X and Y baselines
Color Bar Size: The magnitude of maximum angle/distance wrist motion
Range-Of-Motion Color Size: An easier method to change the maximum values
- Change these parameters if you want to select a subset of the database
- Change the data (*Default: Brown Database*)
Brown Database — Quadratic Surface Model

■ DOF Visualization Panel

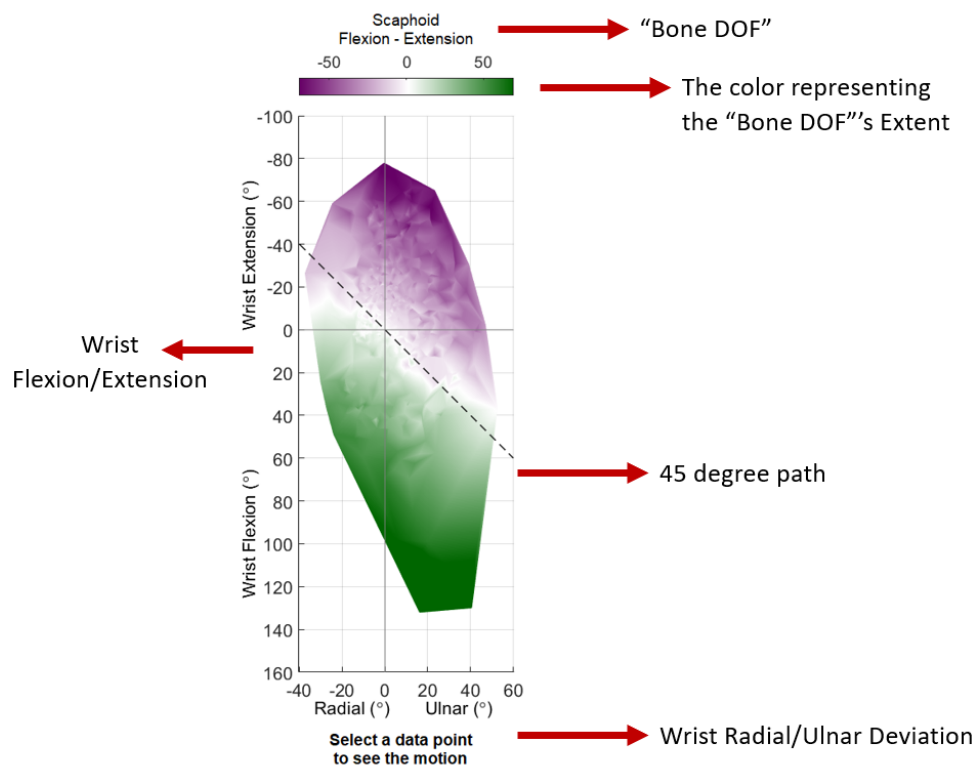


■ Bone Visualization Panel

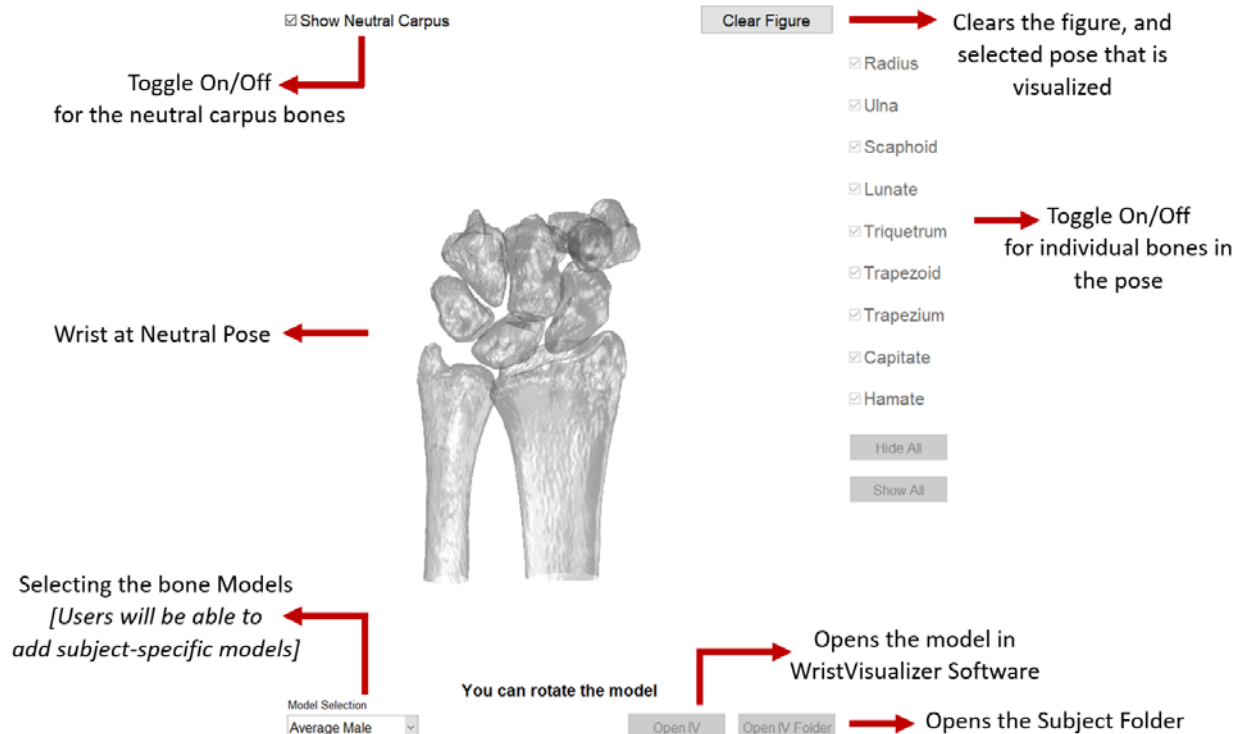


Example (1) – Capitate Visualization

The wrist is 23.7° ulnarly deviated and 57.5° flexed. The Scaphoid is flexed 31.7° . Data comes from a left wrist of a young male.

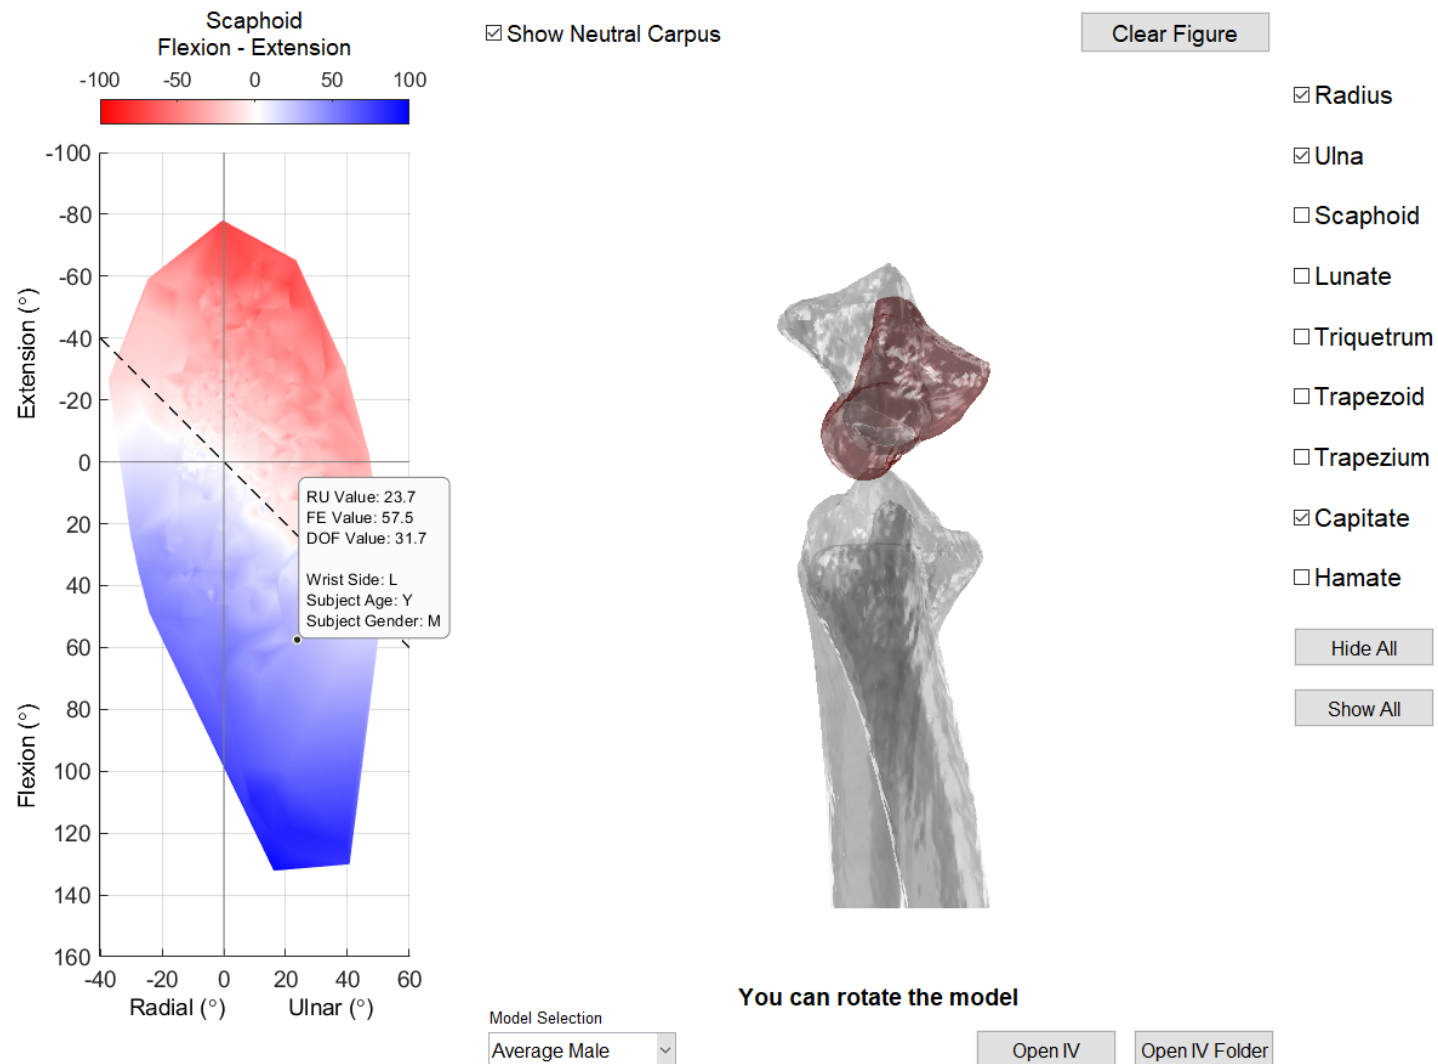


Example (2) – ScaphoidCapitate Visualization

The wrist is 15.5° ulnarly deviated, it is at 54.8° extension. The Scaphoid is extended 52.3° . Data comes from the right wrist of a young female.)

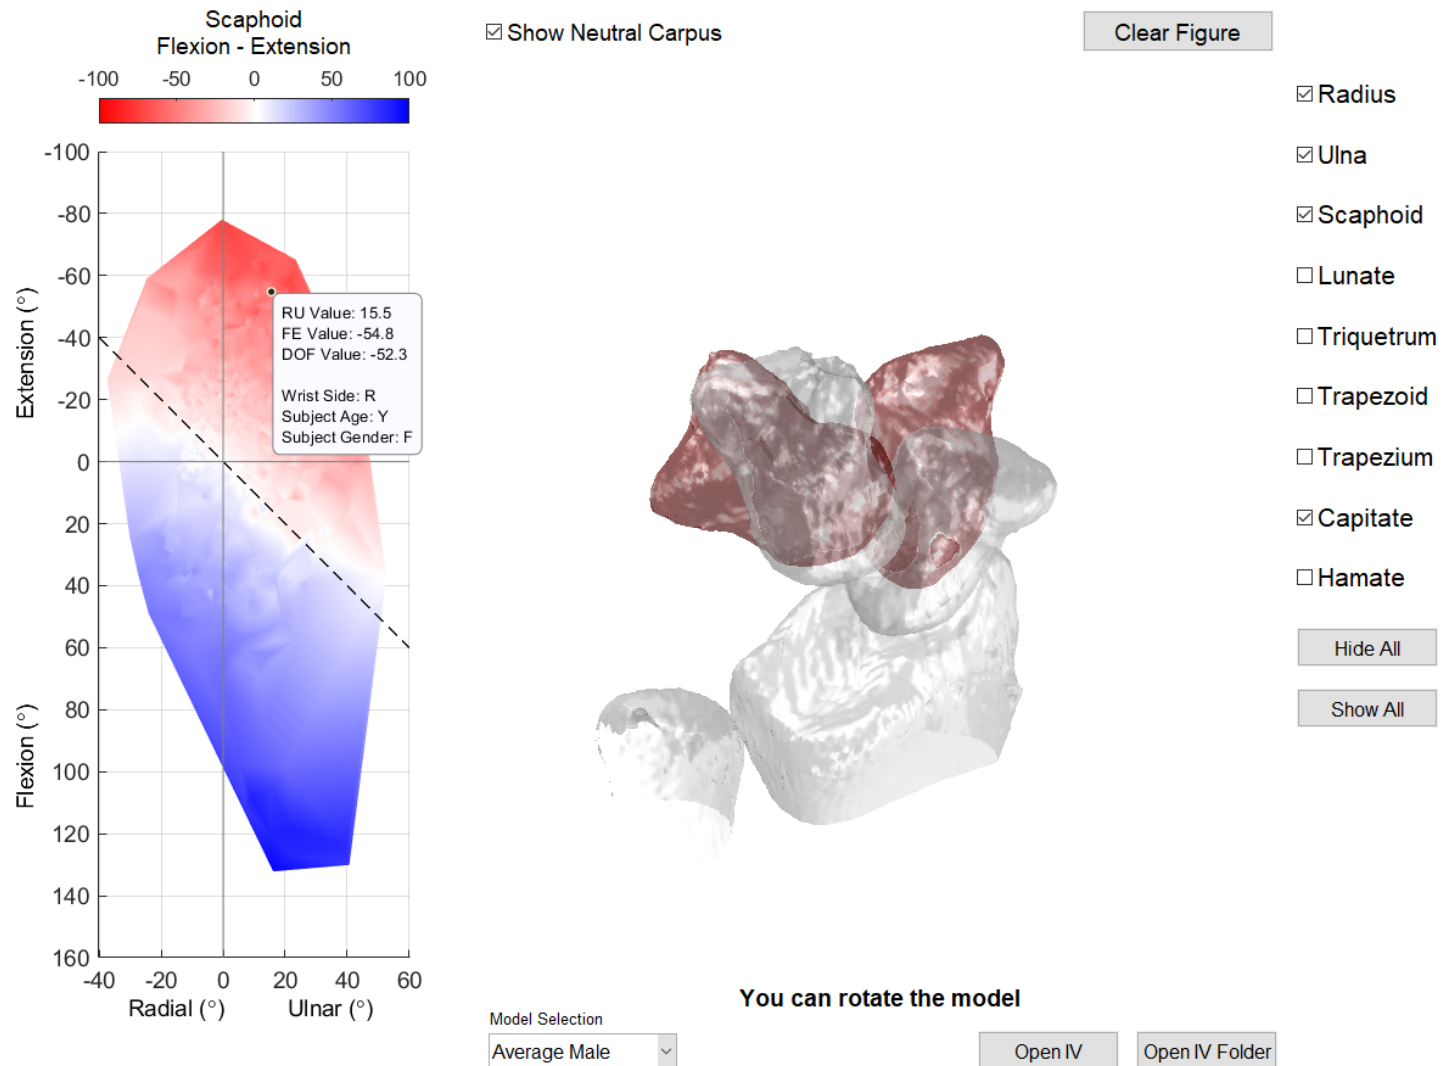


Example (3) – TrapeziumCapitate Visualization

The wrist is 3.3° ulnarly deviated, it is at 41.0° extension. The Trapezium is extended 36.6°. Data comes from the right wrist of a young male.)

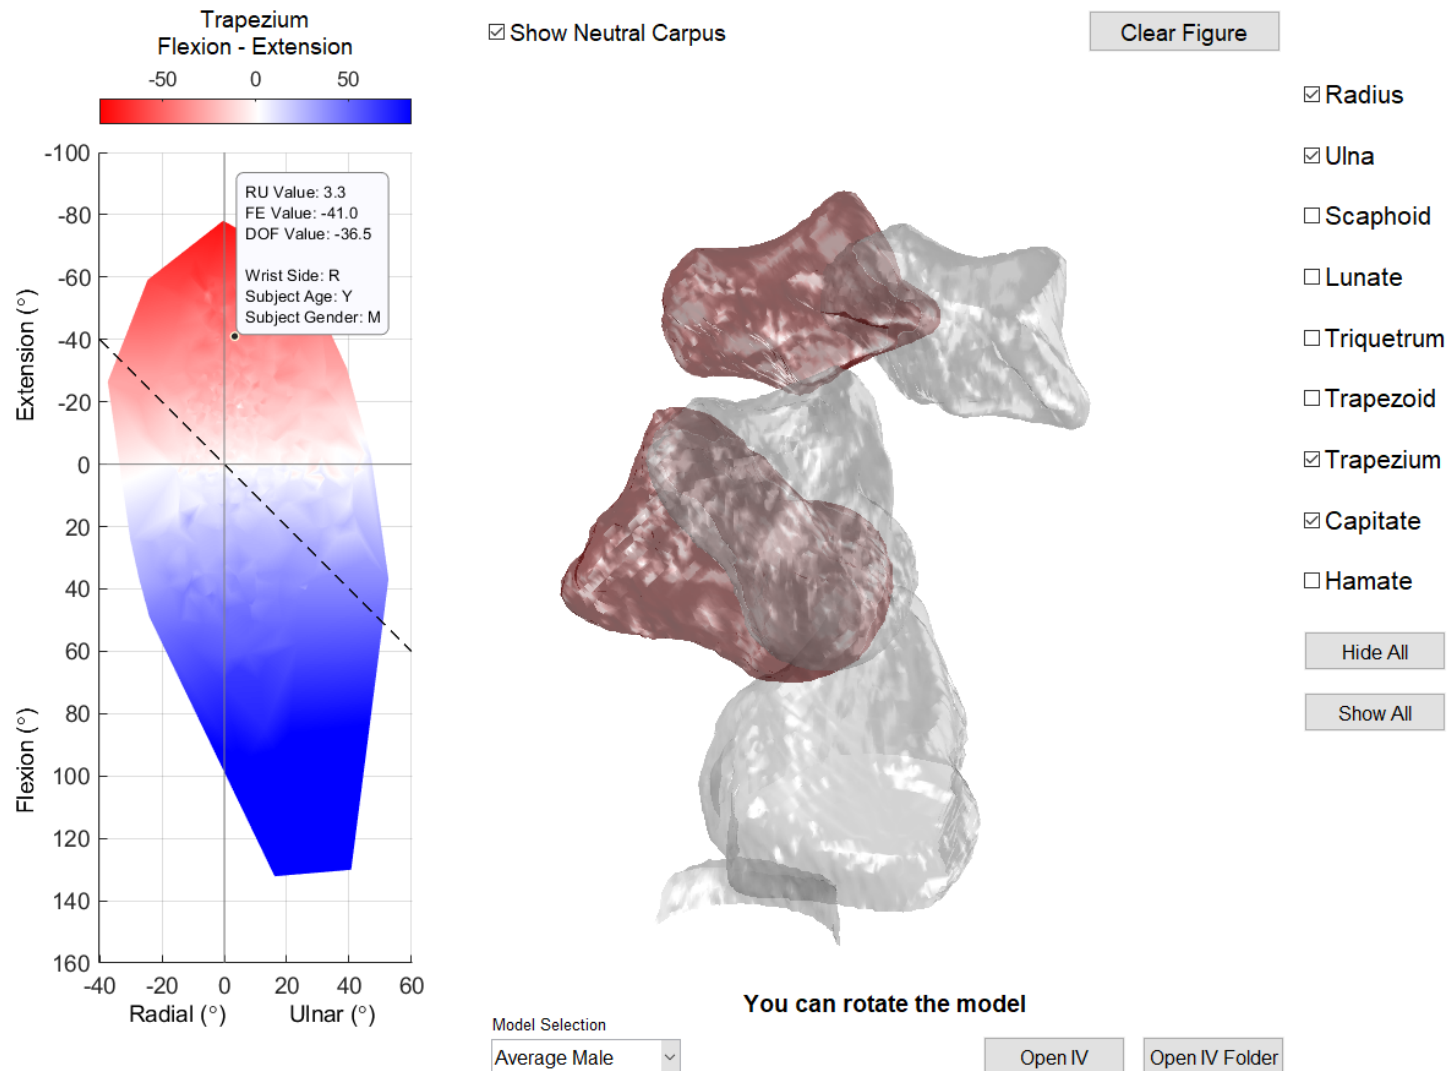


Mathematical Model of Wrist Motion

Our Quadratic Surface Model is preloaded in the GUI, and it can be selected from the data panel:

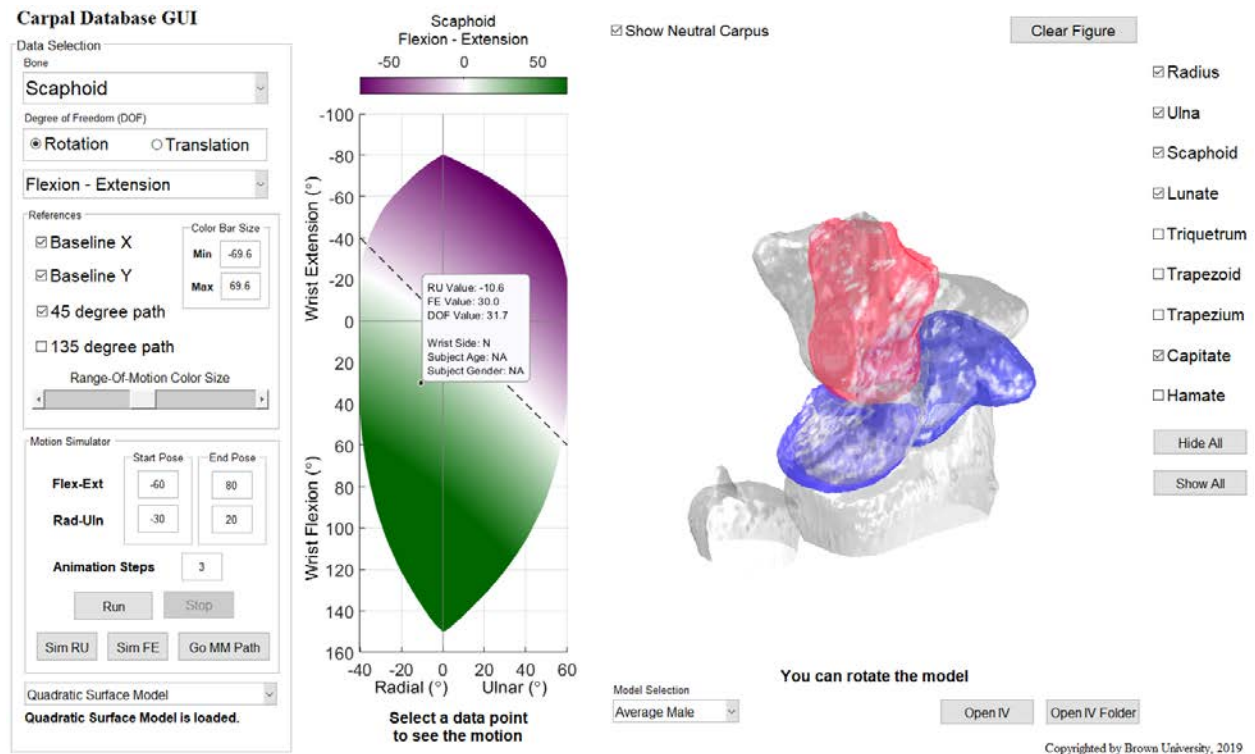


■ Motion Simulator

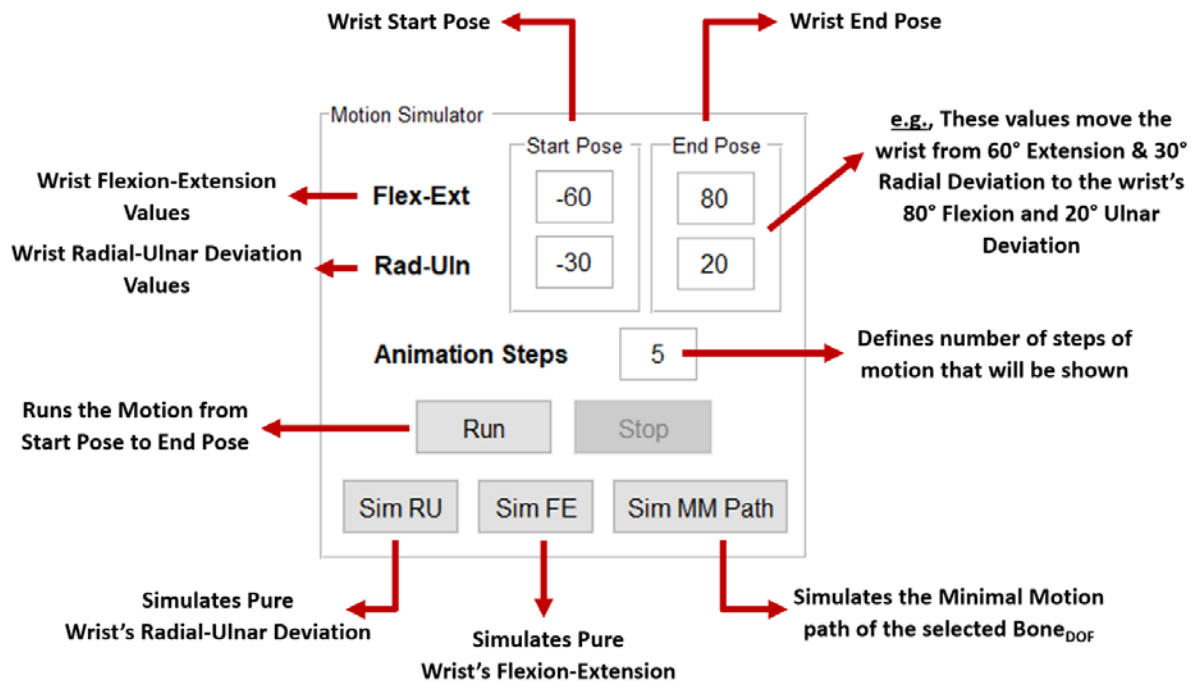

Example (4) – Carpal Bones Visualization

The wrist is 13.8° radially deviated, it is at 74.0° flexion. The scaphoid is flexed at 70.9° .

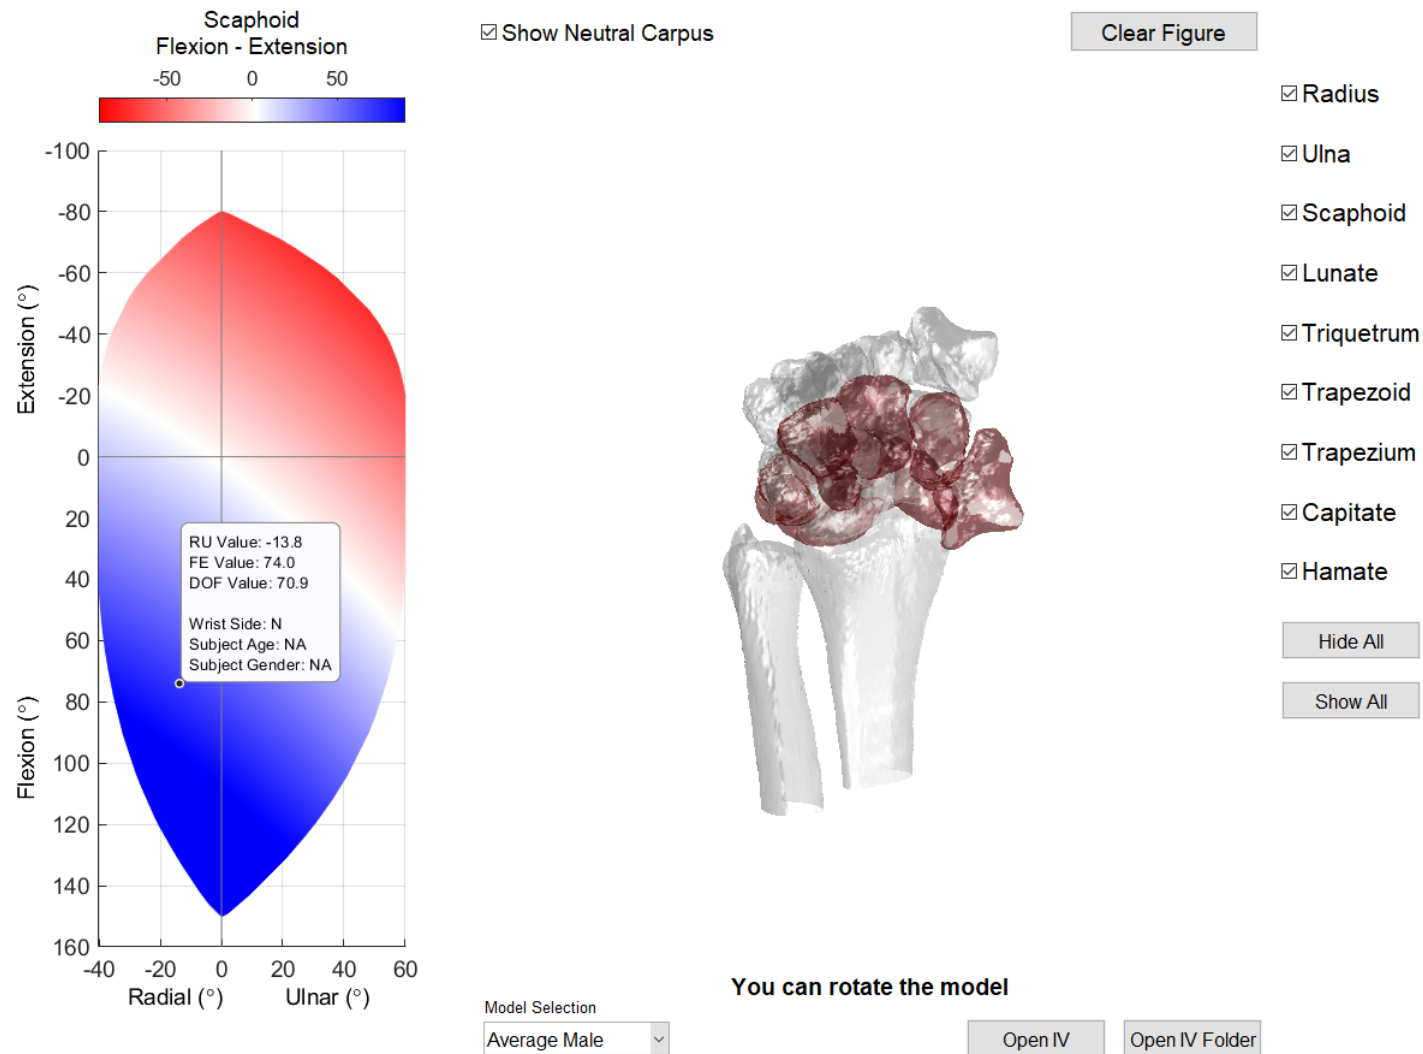

Copyrighted by Brown University, 2019